

Guida all'utilizzo di X-lite 4.0

Con X-lite 4.0 potrete telefonare tramite il canale IP Assomax sfruttando il vostro PC. Per utilizzare questo utile programma, scaricate il software dal sito:

<http://www.counterpath.com/xlite-comparison.html>

installatelo e seguite questi semplici passi:

Passo 1: una volta eseguito il programma andate in alto a sinistra nella barra dei menu e selezionate "Account Settings" dal menù "softphone"; Vi comparirà una schermata come questa:

The screenshot shows the "SIP Account" configuration window. It has a title bar with standard window controls. Below the title bar is a tabbed interface with tabs for "Account", "Voicemail", "Topology", "Presence", "Transport", and "Advanced". The "Account" tab is selected. The form contains the following fields and options:

- Account name:** Text field containing "Account 1".
- Protocol:** Text field containing "SIP".
- Allow this account for:** A section with two checked checkboxes: "Call" and "IM / Presence".
- User Details:** A section with several text fields:
 - User ID:** Empty text field with a yellow warning icon and the text "User ID required" to its right.
 - Domain:** Empty text field with a yellow warning icon and the text "Domain required" to its right.
 - Password:** Password field with a masked character (•).
 - Display name:** Empty text field.
 - Authorization name:** Empty text field.
- Domain Proxy:** A section with a checked checkbox "Register with domain and receive calls". Below it, the text "Send outbound via:" is followed by two radio button options:
 - Domain:** Selected radio button.
 - Proxy:** Unselected radio button, followed by an "Address:" label and an empty text field.

Passo 2: inserite i seguenti dati:

Account Name: il vostro numero di telefono assegnato da Assomax


User ID: assomax_xx dove xx sta per il vostro ID

Domain: sip2.telematicservice.it

Display Name: il vostro nome

Authorization Name: uguale al User ID

Una volta completati questi campi e prima di premere “ok”, comparirà una schermata come questa:

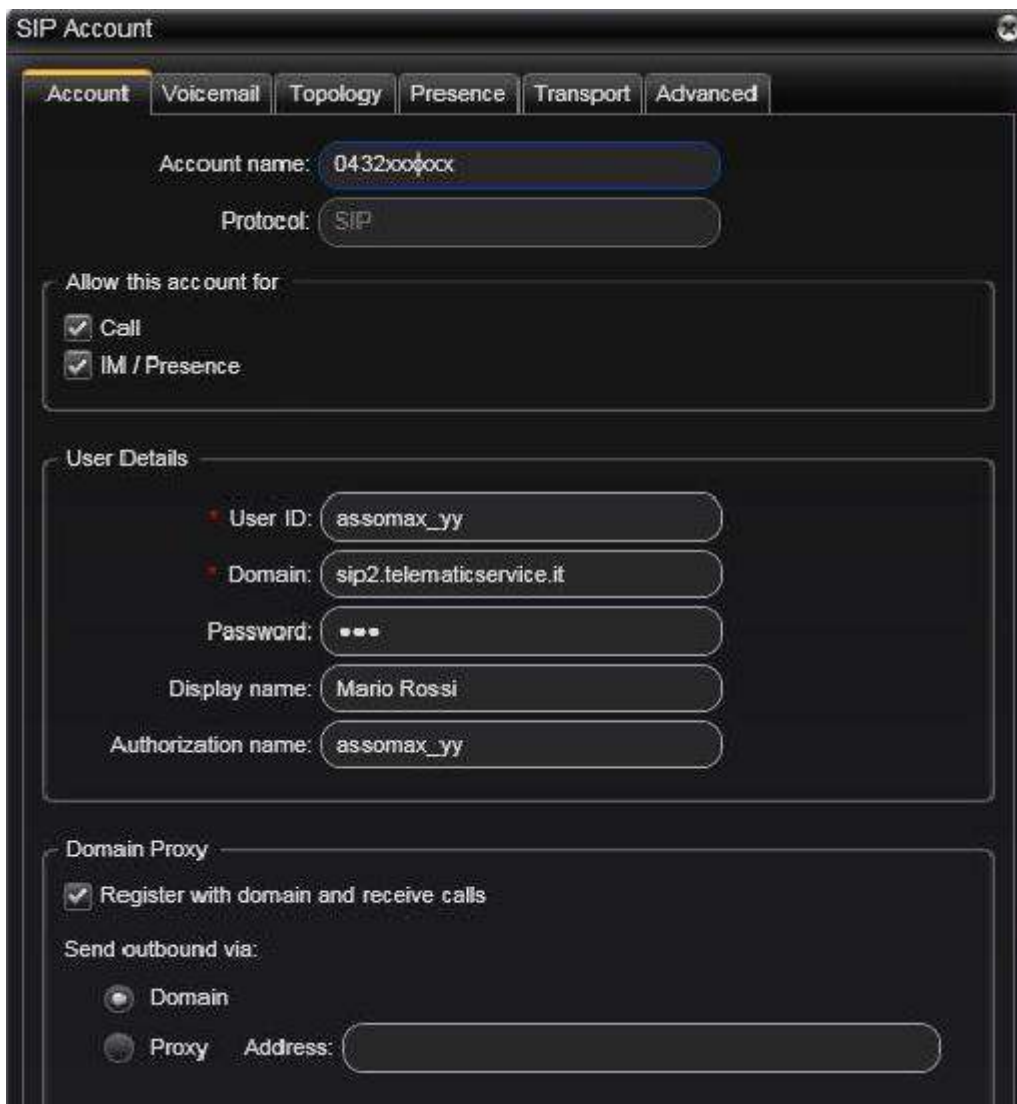

The image shows a screenshot of a "SIP Account" configuration window. The window has a title bar with "SIP Account" and a close button. Below the title bar are several tabs: "Account", "Voicemail", "Topology", "Presence", "Transport", and "Advanced". The "Account" tab is selected. The main content area is divided into several sections:

- Account name:** 04320000000000000000
- Protocol:** SIP
- Allow this account for:**
 - Call
 - IM / Presence
- User Details:**
 - User ID:** assomax_yy
 - Domain:** sip2.telematicservice.it
 - Password:** [masked with dots]
 - Display name:** Mario Rossi
 - Authorization name:** assomax_yy
- Domain Proxy:**
 - Register with domain and receive calls
 - Send outbound via:**
 - Domain
 - Proxy Address: [empty field]

Verificate i dati appena inseriti e al termine premete “OK” in basso a destra.

Passo 3 La configurazione di x-Lite è terminata!

Ora dovete semplicemente utilizzare il tastierino numerico di x-Lite per telefonare oppure impostare i contatti all'interno della rubrica, opzione che vi consentirà di chiamare i vostri contatti senza dover digitare ogni volta il loro numero telefonico.

Per quanto le opzioni più avanzate di x-Lite, è disponibile una guida del software in formato pdf (solo in inglese); per ottenerla cliccate sul link che segue:

<http://www.counterpath.com/x-lite.html>

selezionate l'etichetta "resources" e scaricate la guida.

ASSOMAX S.r.l.

Sede operativa: Campoformido (UD)

Strada dell'Artigiano, 19 -33030

C.F. E P.IVA: 01996630461

Tel: +39 0432 1705210

Fax +39 0432 1705211